

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6: <b>H04Q 11/04, 3/00</b>		<b>A1</b>	(11) International Publication Number: <b>WO 96/38018</b>
			(43) International Publication Date: 28 November 1996 (28.11.96)
(21) International Application Number: <b>PCT/SE96/00680</b>		(51) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 24 May 1996 (24.05.96)			
(30) Priority Data: 952557 24 May 1995 (24.05.95) FI 961690 17 April 1996 (17.04.96) FI			
(71) Applicant (for all designated States except US): TELEFON-AKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).			
(72) Inventors; and (75) Inventors/Applicants (for US only): SZVIATOVSKI, Bal- sz [HU/HU]; Rottenbiller S/B, H-1077 Budapest (HU). KAAKKOLA, Matti [FI/FI]; Tinapellontie 98, FIN-02430 Mastala (FI). KOPONEN, Harri [FI/FI]; Bredantie 26 F, FIN-02700 Kumpulainen (FI). MELEN, Björn [FI/FI]; Aalto 4 D 72, FIN-02320 Espoo (FI). VÄÄNÄNEN, Ossi [FI/FI]; Punkalanselkä 2 D, FIN-21100 Naantali (FI).			
(74) Agents: BOHLIN, Björn et al.; Telefonaktiebolaget LM Eric- sson (publ), Patent and Trademark Dept., S-126 25 Stock- holm (SE).		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments. In English translation (filed in Finnish).	

(54) Title: METHOD AND SYSTEM FOR SETTING UP A SPEECH CONNECTION IN DIFFERENT NETWORKS

## (57) Abstract

The objective of the invention is a system, comprising an ISDN-network, having access through the intelligent network service switching point (SSP) to the services offered by the intelligent network service control point (SCP), a data network, in which at least one computer has a data network-address, and a gateway connecting the networks. The call can be connected to a telephone integrated to the computer, so that the data network-address used by the subscriber's computer and the subscriber's personal identifier are at first transferred to the gateway, which codes the data network-address. Thereafter the coded address, the gateway address and the subscriber's personal identifier are transmitted to the intelligent network and recorded in the database of the Service Data Point (SDP). The intelligent network has now the required data to create the speech connection between the mentioned subscriber and another subscriber.

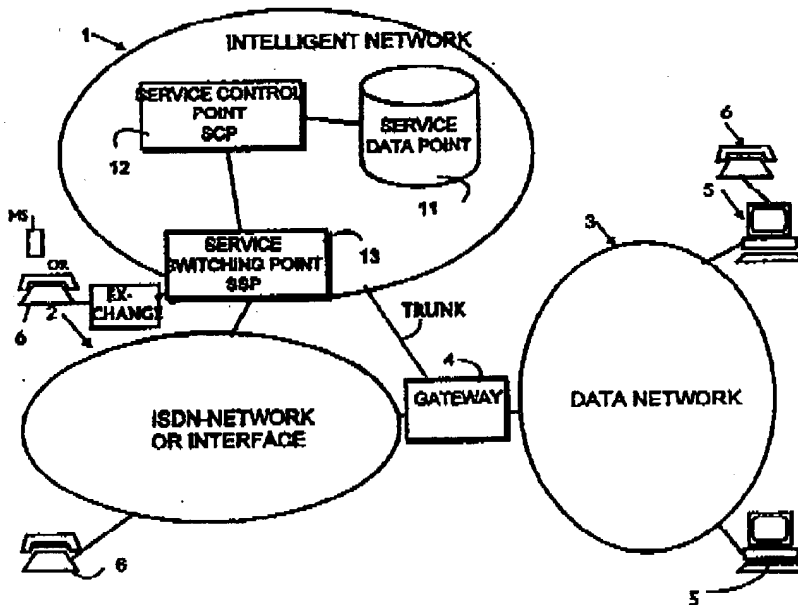

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AD	Andorra	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CV	Cape Verde	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SK	Slovakia
CI	Côte d'Ivoire	LK	Sri Lanka	SL	Sierra Leone
CM	Cameroon	LR	Liberia	SZ	Swaziland
CN	China	LT	Lithuania	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
CZ	Czech Republic	LV	Latvia	TJ	Tajikistan
DE	Germany	MC	Monaco	TT	Trinidad and Tobago
DK	Denmark	MD	Republic of Moldova	UA	Ukraine
EE	Estonia	MG	Madagascar	UG	Uganda
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France	MR	Mauritania	VN	Viet Nam
GA	Gabon				

**METHOD AND SYSTEM FOR SETTING UP A SPEECH CONNECTION IN  
DIFFERENT NETWORKS**

The invention relates in general to the setting up of a  
5 speech connection and especially in a system comprising an  
intelligent network and a data network with connected  
computers.

The rapid growth of the telecommunication has enabled the  
10 teleoperators to offer their users many different kinds of  
services. A network architecture offering advanced services  
is called the intelligent network IN. The intelligent  
network architecture can be applied in most  
telecommunication networks as e.g. in switched telephone  
15 networks PSTN (Public Switched Telephone Network), in mobile  
and packet switched networks PSPDN (Packet Switched Public  
Data Network) as well as in ISDN- and B-ISDN-networks  
(Integrated Services Digital Network, Broadband-ISDN).  
Irrespective of the network technology, the objective of the  
20 intelligent network architecture is to facilitate the  
creation, control and management of new telecommunication  
services.

The Service Switching Point (SSP) contains call management  
25 and service selection functions. It can observe the intelli-  
gent network service requests. The Service Control Point  
(SCP) contains the service programs used to produce the  
intelligent network services. The Service Data Point (SDP)  
is a database, which contains the client and network data  
30 used by the SCP service programs to produce individual  
services. The Intelligent Peripheral (IP) offers special  
functions, such as messages and voice and multi-dialling  
identification. The tasks of the Service Management Point  
(SMP) include database management, network control and  
35 testing, as well as network data collection. It can connect  
to all other physical entities.

The Basic Call State Model (BCSM) defined in connection with the IN-network illustrates the different stages of call control and contains the points where the call control can be interrupted in order to start the intelligent network service. It identifies the detection points in the call and connection process, where the IN service logic entities can be in interaction with the basic call and connection management characteristics.

- 10 As mentioned above, the intelligent network architecture can also be applied in the ISDN-net. The Integrated Digital Services Network (ISDN) is characterized in that the user can with the same user interface utilize several communication services either separately or simultaneously.
- 15 Different applications, such as e.g. terminal, terminal group, multi-service exchange, local area network, other private network, etc. are connected to the ISDN by a restricted user interface group. The ISDN- network provides for the development of the present telephone to be part of a
- 20 multi-service terminal, such as the combination "telephone + PC", enabling simultaneous transmission of speech and data.

The ISDN user-network interface provides different types of channels for the information transmission between the subscriber and the network. The B-channel, which operates at a speed of 64 kbit/s and is provided with timing, is used for all information transmission, e.g. for transmission of all kinds of coded speech or data. The D-channel, which transmission speed is either 16 kbit/s or 64 kbit/s, is primarily intended as a signalling channel for circuit switched connections. Combining the channels provide different channel constructions and ISDN-user interfaces.

25 The Basic Access has a 2B+D-structure and the Basic System Access has a 30B+D-structure. The Basic Access is used to connect one or several terminals directly to the ISDN-

30 network, whereas the Basic System Access is used for connecting big switches and local area networks to the ISDN-network.

The interconnection of local networks through ISDN is today possible, although at a speed of 64 kbit/s, but the speed is however not sufficient for the transmission of large files or graphic applications. The deficiencies of the ISDN-networks are eliminated by networks using the Asynchronous Transfer Mode (ATM) as multiplexing method. ATM is a connection-based technology, in which the blocks belonging to the same connection are identified based on e.g. the virtual channel (VCI) or the virtual path (VPI) of the heading identifier. The value of the VCI used is defined during setup and the VPIs are setup more permanently using the network management functions. The virtual channel identifier relates either to the connection or to a single service component, e.g. a picture, voice, etc. The identifier is connection dependent and is maintained during the whole connection. Signalling and user data are transmitted on separate virtual channels. Several extensive computer networks are based on the ATM-technology.

Known intelligent network services are the call remote control, the follow-me-diversion (FMD), in which the service subscriber receives a number to which the coming calls are transferred according to the phone number each time registered for the subscriber, and the personal number UPT (universal personal telecommunications), in which the service subscriber can make calls from any terminal and receive calls to any terminal in different networks. In the latter service, the call type is only restricted by the properties of the terminal and the network, the subscriber has a personal and network independent number.

The problem with the types of services described above is that the call cannot be transferred to a phone connected to a network formed by computers, a data network, which is outside the digital network, e.g. the ISDN-network. In this network the transmission connections can e.g. be based on ATM. The worldwide Internet e.g. is such a network. In the

data network every terminal, such as the PC- or work station, has its own data network address for receiving incoming information. In Internet the standard address is in the form user@outn.,,out1.0.top. User is the name of the user, the ou can be from zero to a few and top is top level domain, in Finland e.g. fi. If a telephone is integrated to such a terminal, a mechanism has not yet been introduced for setting up a call between this telephone and e.g. a subscriber connected to the ISDN-net. The lack of this mechanism prevents from using the intelligent network services such as the personal number UPT.

The objective of this invention is thus to provide a mechanism by which the subscriber primarily can call any number from a telephone connected to the data network such as internet via the work station, and secondly by which the subscriber can direct the incoming calls to the work station currently in use. In the latter case the calling subscriber does not necessarily know the location of the called subscriber.

The objective set is achieved by the method presented in claims 1 and 14 and the system is embodied by the arrangements according to claims 17 and 18.

The invention is a method of setting up a speech connection between the users of two or several terminals being in different networks in a system comprising an intelligent network, in which the call from the exchange and/or switch is transferred through the Service Switching Point (SSP), which starts the inquiry via the common channel signalling network to the service data base, in which the required information is traced for the handling of the call, and which returns this data through the signalling network or corresponding and SSP back to the exchange and/or switch, the exchange and/or switch uses the data to set up the call, a data network, in which at least one logged-in computer has a data network address and a telephone integrated to the

computer, and a gateway connecting the networks, in which  
method the address information of the logged-in computer in  
the data network is transferred to the gateway, from the  
gateway the message is transmitted to the intelligent  
5 network to update the address data of the subscriber's  
computer logged into the data network, and the speech  
connection between the mentioned subscriber and the other  
subscriber is created controlled by the intelligent network,  
when speech connection is desired.

10 The invention utilizes the intelligent network and the  
personal addresses of the data network work stations so  
that, when the subscriber starts his work station and  
connects into the data network, he at the same time sends  
15 his current data network address as well as his personal  
identifier PI, which are transmitted to the gateway  
connecting the data network and the ISDN-net. Internet is  
used as an example in the description.

20 The gateway converts the internet-address to an ISDN-address  
and sends it and the PI-identifier via the intelligent  
network Service Switching Point (SSP) to the Service Control  
Point (SCP). SCP stores the data in the Service Data Point  
(SDP) database.

25 All control functions are concentrated in the intelligent  
network, wherefore a speech connection can be set up between  
the subscriber and any other subscriber using the  
intelligent network functions. The other subscriber can be  
30 an ISDN-subscriber, a PSTN-subscriber or a subscriber  
connected to the data network. Because the intelligent  
network has the routing information about the subscriber's  
location, the subscriber can use services like the call  
remote control FMD (follow-me-diversion) and the personal  
35 number UPT (universal personal telecommunications).

The invention is below presented more in detail by means of  
one preferable form of embodiment and with reference to the

enclosed pictures, of which

- Fig. 1 presents the system architecture in a simplified form.
- Fig. 2 shows a simplified construction of the gateway.
- 5 Fig. 3 shows a basic diagram of how calls can be placed in the network after the logging-in of the work station the telephone user.
- Fig. 4 presents a block diagram of the activation of the call control to the IN.
- 10 Fig. 5 shows a block diagram of the work station log-in data stages to the gateway.
- Fig. 6 shows a block diagram of another possible activation of fig. 4.
- 15 Fig. 1 presents with reference number 1 the essential functional entireties of the IN-network for the subject invention. The general tasks of the service switching point 13 and the service data point 11 have been presented already in the beginning of the description. The intelligent network
- 20 1 is switched to the ISDN-network 2 through the service switching point 13. The reference number 6 presents the subscriber apparatus, in this case a telephone, which is switched with the Basic Access 2B+D-construction directly to the ISDN-network. The interconnection of the ISDN-network 1
- 25 and the intelligent network 2 is well known in the field.

Reference number 3 illustrates the network formed by computers, which here is an internet having PC- or work stations 5. The network 3 is also as such known. The PC comprises a

30 central processing unit (CPU), memories (program and main memory, such as ROM or RAM, hard disk), cards to produce additional activities and a bus for connecting the parts. The PC input and output can be displayed on the screen or e.g. with a printer. The user can enter data using the

35 keyboard, a mouse or other corresponding standard feed device. PC contains today multimedia equipment for picture, voice or text processing. The PC is provided with e.g. a sound card or corresponding to which a microphone and



loudspeaker can be connected for the transmission and receiving of speech. The microphone and the loudspeaker can be built into the PC or the PC-peripheral device, the display unit, be external or a common handset. For the data  
5 network, the PC is provided with a network adapter through which the PC is in connection with the data network.

For the interconnection of the networks 2 and 3 is below suggested the ISDN-gateway 4, the simplified block diagram  
10 of which is presented in fig. 2. The gateway 4, which can be a server, comprises towards the ATM-network a user interface, which includes the hardware 42, their drivers 44 and the internet protocol processing block 45. On the other side it comprises towards the ISDN-network a user interface,  
15 which can be a standard basic system access 30B+D, including the hardware 41, their drivers 43 and the drivers' development kit library 46.

The additions according to the invention to the gateway  
20 function are as follows: the gateway 4 talks with computers connected to the computer or data network and has at least the following tasks a) call identification, i.e. it identifies the call request from the ISDN- and data networks, b) transmission of the A- and B-numbers, and c)  
25 creation and release of the speech connection inside the gateway and from the gateway to the work station telephone. The gateway switching control program 48 receives from the ATM-network the internet-address and converts it into a decimal coded ISDN-address. It transmits the converted  
30 address to the intelligent network to be recorded in the user database SDP. In the method according to the invention, the routing information to the subscriber has to be transmitted to the intelligent network database. This happens so that the user when starting the work station logs  
35 normally into internet, possibly using a password. Thereafter he/she registers into the intelligent network by starting a special telephone program. The program sends to the gateway an internet-address according to the internet

- protocol (IP) and the user's personal identification number given to the work station by the user in response to the telephone program request. The service number of the intelligent network service handling the call control can be
- 5 added automatically to the transmission by the program or should be added by the user. The service can be of the known personal number-type UPT (universal personal telecommunications). The information set sent by the program to the gateway is thus "the intelligent network service number +
- 10 the IP-address + the user's personal identifier". The mechanism for forming and transmitting this information set in practice is not essential for the invention, it is only essential that the gateway receives the information set.
- 15 When the gateway has received from the data network the information set sent by the work station, its switching control program 48, fig. 2, encodes the IP-protocol address to the decimal form used in the ISDN-world. The internet-address form is called the dotted decimal representation of
- 20 the binary 32 bit information structure, whereby the address can be expressed in the form 8bit. 8bit. 8bit. 8bit. The binary address is decimal coded into 10 digit decimals (10 base figures) in known way. The gateway 4 transmits the series "the intelligent network service number + the decimal
- 25 coded IP-address + the user's personal identifier + the gateway address" to the ISDN-network exchange, using e.g. Telefonaktiebolaget L M Ericsson's AXE-exchange and the ISDN connected thereto.
- 30 The gateway can use for the transmission of this series a proper message according to the ISUP-protocol (Integrated Services Digital Network user Part (CCITT Number 7) (International Telegraph and Telephone Consultative Committee), such as the IAM-message (Initial Address
- 35 Message) and place the data in a suitable IAM-message field defined in ETSI (European Telecommunications Standards Institute). A proper field could be the known A- or B-number sub-field or directly the A-number field. In both cases the

intelligent network is capable of reading the information transmitted. When the message has reached the exchange, the intelligent network service switching point SSP 13, fig. 1, identifies the intelligent network service number and starts  
5 the intelligent network service. The service places the decimal-coded IP-address defining the subscriber's location + the user's personal identifier + the gateway address in the service data database. When the calling subscriber, e.g. the ISDN-subscriber 6, dials the intelligent network service  
10 number and the personal identification number of the subscriber logged into the intelligent network through the work station, the intelligent network is capable of retrieving from the database the information of the called subscriber and accordingly connect the call to the telephone  
15 integrated to the computer. All calls to and from the work station are centralized controlled by the intelligent network. The call routing is thus using standard IN-databases and traditional ISDN-network node routing tables. The call is routed to a gateway obtained from the subscriber  
20 data, which gateway performs the IP-number conversion and thereafter routes the call to the correct work station.

According to one preferable embodiment, the intelligent network service is like a personal number UPT-service, which  
25 here is called the advanced personal telecommunication service. The advanced personal telecommunication service enables to reach the person from several numbers. The service subscriber has a so called personal number comprising the intelligent network service number + the  
30 personal subscriber identifier. The number could e.g. be 02-08-445566. Number 02 defines the operator and number 08 the operator service, which in our example is an advanced personal telecommunication service. 0208 is thus from the subscriber's viewpoint a service number. Number 445566 is  
35 the personal user identifier. The subscriber's mobile phone number, paging device number, voice-mail number and according to the subject invention the work station telephone number have been recorded in the intelligent net. The

10

- calling subscriber dials only the number 02-08-445566, which transfers the call to the intelligent network, whose intelligent network service checks from the database which actual numbers correspond to the personal user identifier.
- 5 The service calls the subscriber at the different numbers in a given order and connects the call to where the subscriber answers. The calling subscriber does not know the real location of the called subscriber. The order for searching the called subscriber is optional, but the work station
- 10 telephone number should obviously be given the highest priority. If the user has not registered through the work station, he can possibly be reached at the next number, thus avoiding unnecessary signalling and call delay.
- 15 As all subscriber data are recorded in the same location in the service datapoint 11, fig. 1, the subscriber management is easy. It is also possible for the service subscriber himself to define the priority order of the numbers where he can be reached. The transactions for the call to end at the
- 20 work station and to start from the work station are as follows (figs. 3, 4, 5 and 6).

- When the call terminates at the work station, the call process comprises two stages: the intelligent network has
- 25 first to be reached and after that the called subscriber controlled by the intelligent network. In this case the billing of the call can be such that the B-subscriber, i.e. the service subscriber, pays most part of the costs, and the calling A-subscriber pays a certain basic charge. Another
- 30 option is to charge the A-subscriber more than the basic charge in which case a voice-message is sent to him informing about the call costs. The actual billing is made afterwards based on the billing records. The calling A-subscriber, who could be a plain old telephone (POT)-network
- 35 subscriber or an ISDN-subscriber, dials on his phone the intelligent network service number + the personal user identifier. The number can still be the above mentioned 02-08-445566. The exchange identifies from the service number

11

0208 that it is an intelligent call and transmits the call to the service switching point 13, which starts the exchange of messages with the service control point 12 and transmits the user identifier 445566 to the service logic, which  
5 controls the call from this point onwards. The service logic checks from the database 11 which numbers correspond to the user identifier and in which order the B-subscriber is searched. It discovers that the B-subscriber has registered to the work station phone. The first stage is concluded,  
10 i.e. the intelligent network has been accessed and the service knows the coded IP-address of the B-subscriber and the ISDN-gateway number.

The second stage comprises the transmitting of the call to  
15 the work station phone. This occurs so that the call is first transmitted to the gateway 4 and the B-subscriber IP-number is disclosed. Thereafter the gateway decodes the IP-number into an internet-address and establishes the voice-connection to the correct work station 5. Finally, the  
20 gateway switches connection between the ISDN-network and the data network. There are at least two different ways of transmitting the call to the gateway 4.

In the first way the gateway number and the IP-address are  
25 in the ISUP-protocol initial address message (IAM) placed in the field reserved for the C-number. The C-number means as is known the number obtained in the number conversion by the intelligent network service from the database. The A-number is thus the number of the calling subscriber, the B-number  
30 is the number dialled by the calling subscriber, which contains the personal identifier of the B-subscriber and the C-number is the actual number retrieved from the database to which the call is to be routed. In this case the C-number is  
"the gateway number + the IP-address coded into tens  
35 digits". This first method is operator dependent.

The second way utilizes the fact that ISDN enables the use of an extra field in the address messages such as the IAM,

which field identifies different entities behind the ISDN-address. The gateway number is thus placed in the field reserved for the C-number of the initial address message and the IP-address is placed in the sub-address field related thereto. IN-solutions of some manufactures such as the applicant have considered the information transmission to an extra field and the reading of this field.

In both ways the gateway number routes the call to the right gateway. The gateway number can be of the PBX-(Private Branch Exchange)-number type or a combination of a special routing prefix and a gateway information. The such encoded IP-number comes transparently through the ISDN-network to the right gateway 4, which reads it from the C-number field or from the extra field. Thereafter the gateway is capable of routing the call based on the internet-address to the right work station or PC 5.

Next it is considered the case when the call is placed from a phone connected to a computer 5 (fig.1). Billing is then the problem, as from the intelligent network's viewpoint the starting point of the call is the gateway and the actual subscriber cannot easily be identified behind the gateway. An identifying procedure must therefore be introduced in order to bill the right person for the call. This can be implemented e.g. as follows:

The subscriber dials at first the intelligent network service number and his personal user identifier, based on which the service identifies the subscriber. This stage can be free of charge. The number sequence can be e.g. 0800-02-09-445566, in which the service number part 0800 discloses the reversed billing, 02 is the operator identifier and 09 the service identifier. 445566 is the personal user identifier. After this the billing is no more a problem. Finally the subscriber dials the number of the called subscriber, which can be a PSTN(Public Switched Telephone Network)-number, an ISDN-number or a personal number, if the

13

called subscriber has it. The IN-network transmits the call to the right destination, and if the number is a personal number, checks from its database the actual number to which the call is to be routed. The actual number can thus also be  
5 an internet-address.

The method according to the invention, in which all control functions are centralized in the intelligent network, enables to reach the subscriber by phone even when he is  
10 occupied with his computer. When he moves to another computer, he can before leaving delete his registering from the intelligent network database by dialling the intelligent network service number and his personal user identifier and by setting proper options (mobile phone, pager, etc.) The  
15 old registration is alternatively deleted automatically when the user registers from a new computer.

To prevent the intelligent network from setting up a speech connection through a damaged gateway, it can occasionally  
20 check the condition of the gateway and assign a condition flag. The condition of the flag is checked when the call is set up and if the flag indicates a gateway disorder, the call is not unnecessary tried to set up but the call is placed to the pager, mobile phone or another number given by  
25 the database.

It should further be noted that the control functions of the gateway and of the speech transfer and switching control functions of the phone connected to the computer have been  
30 implemented both in the gateway and in the computer.

The description and the figures related thereto are only intended to illustrate the subject invention. Different adaptions and modifications are obvious to experts within  
35 the field without deviating from the scope and basic idea of the invention as presented in the enclosed claims.

CLAIMS

1. A method of setting up a speech connection in different networks between the users of two or several terminals in a system comprising
  - an intelligent network, in which the call from the exchange and/or switch is transferred through the Service Switching Point SSP, which starts the inquiry via the common channel signalling network to the service data base, in which the required data is traced for the handling of the call, and which returns this data through the signalling network or corresponding and SSP back to the exchange and/or switch, the exchange and/or switch uses the information to set up the call,
  - a data network, in which at least one logged-in computer has a data network address and a telephone has been integrated to the computer, and
  - a gateway connecting networks, in which method the address information of the logged-in computer in the data network is transferred to the gateway, characterized in that from the gateway the message is transmitted to the intelligent network to update the address data of the subscriber's computer logged into the data network, and
- the speech connection between the mentioned subscriber and the other subscriber is created controlled by the intelligent network, when speech connection is desired.
2. Method according to claim 1, characterized in that the data network-address is converted into a coded address in the gateway, the coded address, the gateway address and the subscriber's personal identifier are transmitted to the intelligent network and recorded in the database of SDP (Service Data Point), or corresponding.
3. Method according to claims 1 or 2, characterized in that when setting up a call to a phone integrated to the computer;



15

the telephone number dialled by the A-subscriber is directed to the service control point, which retrieves from its database the corresponding address information of the subscriber called, e.g. the coded address and the gateway address, the coded address is transmitted to the gateway, the gateway decodes the coded address into a data network-address and connects the incoming call to the phone having the data network-address.

4. Method according to claim 1, characterized in that when setting up a call from a computer integrated phone to the B-subscriber's phone; the A-subscriber dials at first the intelligent network service number and his own personal identifier, based on which the calling A-subscriber is identified, and thereafter the B-subscriber number, the call is routed to the B-subscriber number controlled by the intelligent network.

5. Method according to claim 4, characterized in that when the B-subscriber number includes the intelligent network service number and the subscriber identifying number, the service control point retrieves from the database the phone number corresponding to the identifying number and directs the call to this phone number.

6. Method according to claim 5, characterized in that when the phone number is a coded address and the gateway address, the call is routed to the gateway, which connects the call further to the data network-address corresponding to the coded address.

7. Method according to claim 1, characterized in that when the subscriber logs out from the computer, the use of the address information, e.g. the coded address and the gateway address, is deleted or at least eliminated from the database of the SDP (Service Data Point) or

16

corresponding.

8. Method according to claim 1, characterized  
in that several subscriber numbers at which the subscriber  
5 can be reached by calling are recorded in the database, e.g.  
the intelligent network, such as the mobile phone number,  
the paging device number, the voice-mail number and the work  
station phone number, and to which the calling subscriber  
has access with one number combination, the so called  
10 personal number, when the calling subscriber has dialled the  
personal number the call is transferred to the database  
where is checked which actual numbers correspond to the  
personal user identifier, the subscriber is called in the  
desired order, and the call is connected to where the  
15 subscriber answers.

9. Method according to claim 8, characterized  
in that the phone number of the work station is given the  
highest priority.

20

10. Method according to one or several of the claims above,  
characterized in that the gateway number and  
the IP-address are placed in the field reserved for the C-  
25 number, which C-number is the actual number retrieved from  
the database to which the call is to be routed.

11. Method according to one or several of the claims 1-9  
above, characterized that an extra field is  
30 used in the ISDN-address messages as in the IAM, which field  
identifies different entities behind the ISDN-address, so  
that the gateway number is placed in the field reserved for  
C-number of the initial address message and the coded IP-  
address is placed in the sub-address field related to this  
35 field.

12. Method according to claims 10 or 11, character

17

i z e d in that call is routed to the gateway, which number  
is e.g. of the PBX-(Private Branch Exchange)-number type or  
a combination of the routing prefix and the gateway  
information, and which reads its C-number from the field or  
5 from the extra field.

13. Method according to claim 12, c h a r a c t e r i z e d  
in that the call is routed in the gateway based on the  
internet-address to the desired work station or PC(personal  
10 computer) (5).

14. Method of setting up a speech connection between  
networks in a system comprising an ISDN-network, from which  
there is access via the intelligent network service  
15 switching point SSP to the services offered by the  
intelligent network service control point SCP, a data  
network, in which at least one computer has a data network-  
address and a telephone is integrated to the computer, and  
a gateway combining networks,  
20 c h a r a c t e r i z e d in that  
the data network-address used by the subscriber and the  
subscriber's personal identifier are transferred to the  
gateway, which converts the data network-address to a coded  
address, the coded address, the gateway address and the  
25 subscriber's personal identifier are transferred to the  
intelligent network and recorded in the Service Data Point  
(SDP) database, and the speech connection between the  
mentioned subscriber and the other subscriber is created  
controlled by the intelligent net.

30  
15. Method according to any of the claims above, c h a r a  
c - t e r i z e d in that the subscriber's address data is  
combined with the personal number (UPT), whereby the  
subscriber can be reached at one number from the A-  
35 subscriber's viewpoint.

16. Method according to any of the claims above, c h a r a  
c -



18

terized in that the address information is changed  
between the data and the telephone networks.

17. An arrangement for setting up a speech connection in  
5 different networks between the users of two or several  
terminals, in a system comprising  
an intelligent network, in which the call from the exchange  
and/or switch is transferred through the service switching  
point SSP, which starts the inquiry via the common channel  
10 signalling network to the service database, where the  
required data is traced in order to handle the call, and  
which returns this data through the signalling network or  
corresponding and through the SSP back to the exchange  
and/or switch, the exchange and/or switch uses the data to  
15 set up the call,  
a data network, in which at least one computer, which is  
logged-in, has a data network-address and a phone integrated  
to the computer, and  
a gateway connecting networks,  
20 in which arrangement the computer in the data network is  
logged in, the address data is transferred to the gateway,  
characterized in that  
from the gateway the message is transferred to the  
intelligent network to update the subscriber's address data  
25 in the subscriber's computer logged into in the data  
network, and  
a speech connection between the mentioned subscriber and  
another subscriber is created controlled by the intelligent  
network, when speech connection is desired.  
30
18. A system for embodying an intelligent network service in  
an arrangement, comprising  
an ISDN-network, having access through the intelligent  
network service switching point SSP to the services offered  
35 by the intelligent network service control point SCP,  
a data network, in which at least one computer has a data  
network-address and a phone integrated to the computer, and

19

a gateway connecting networks,  
c h a r a c t e r i z e d in that the phone numbers  
informed by the subscriber and coded address corresponding  
to the data network-address of the computer currently used  
5 by the subscriber, the gateway address and the subscriber's  
personal identifier are recorded in the SDP (Service Data  
Point) or corresponding database, and that the speech  
connection between the mentioned subscriber and another  
subscriber is created controlled by the intelligent network  
10 to one of the phone numbers given by the subscriber or to  
the data network-address.

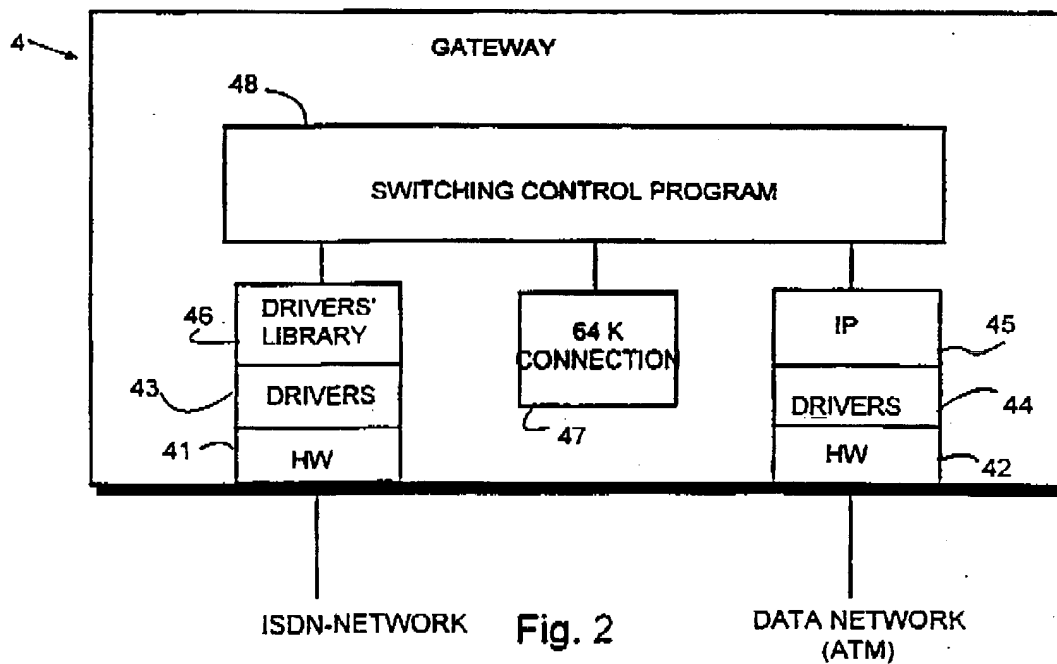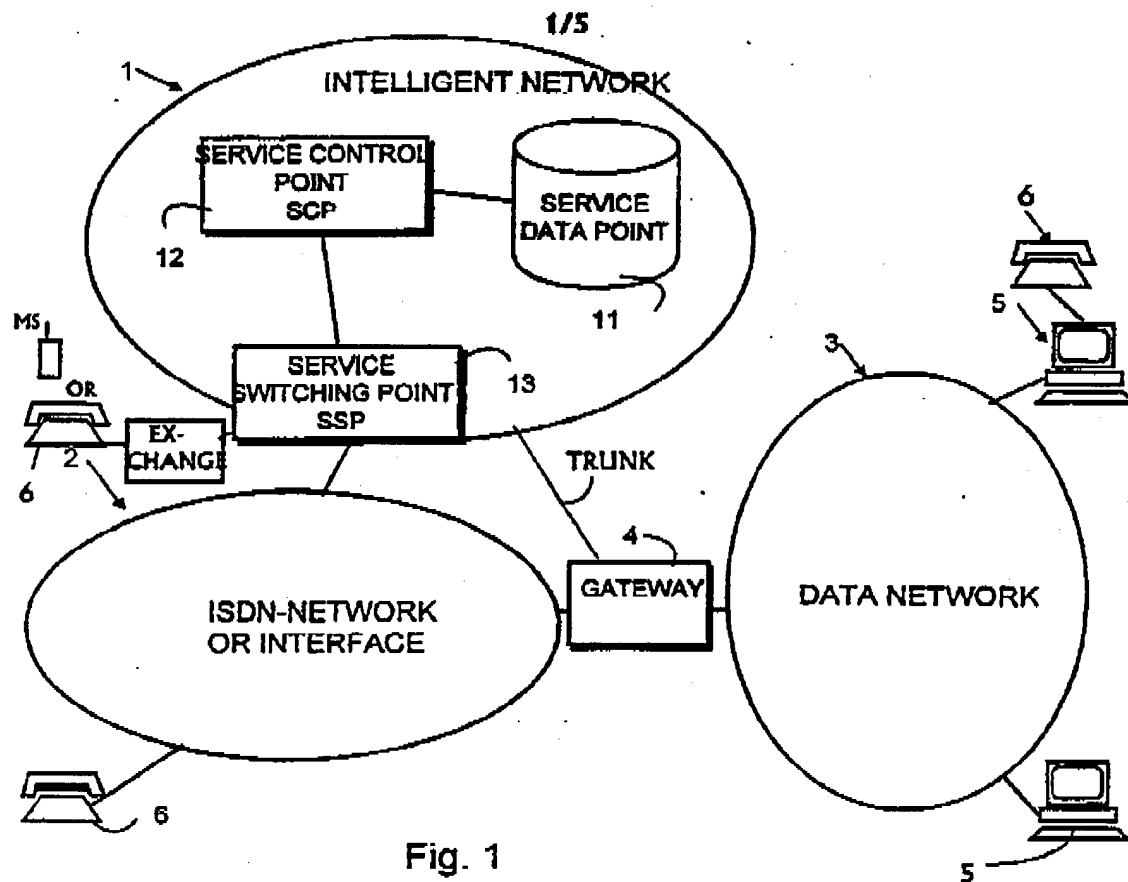

2/5


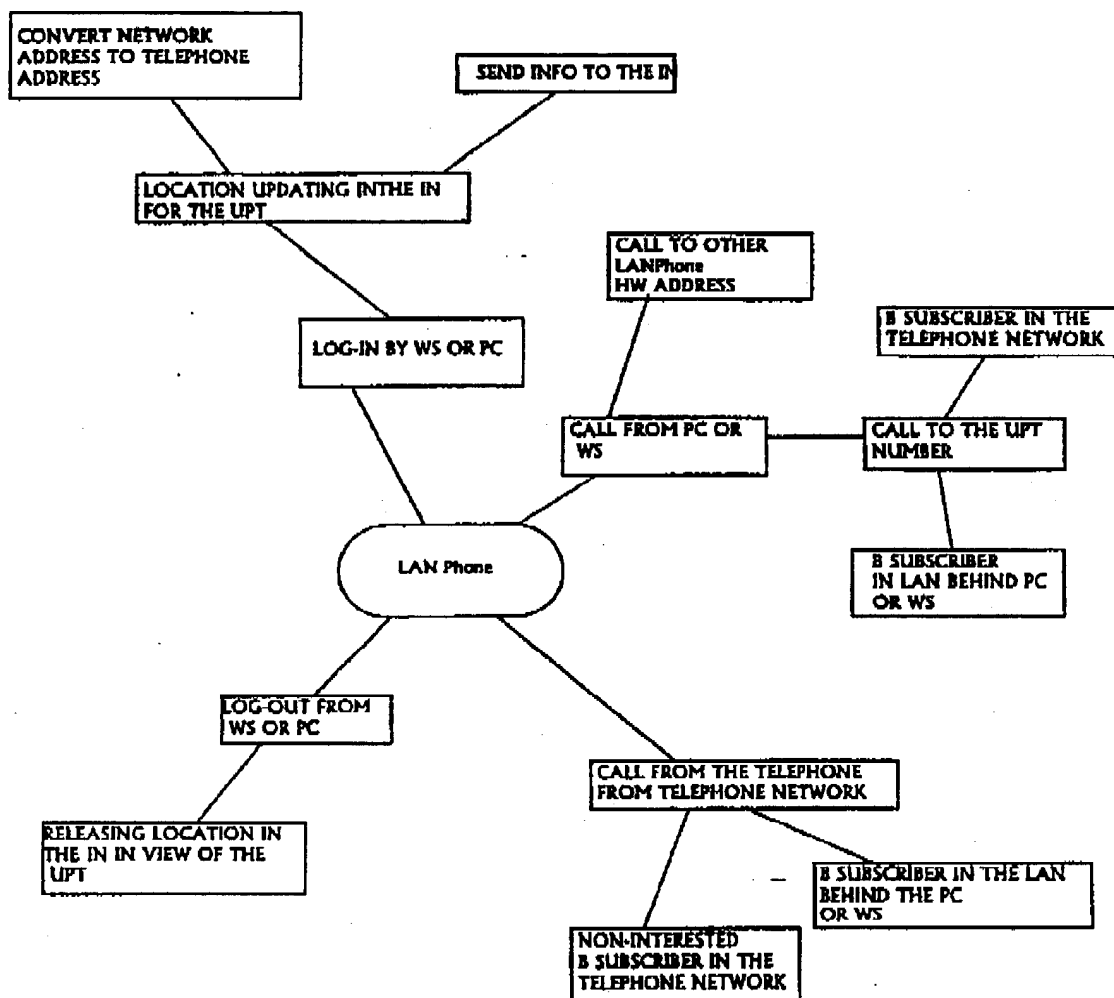


FIG. 3

3/5



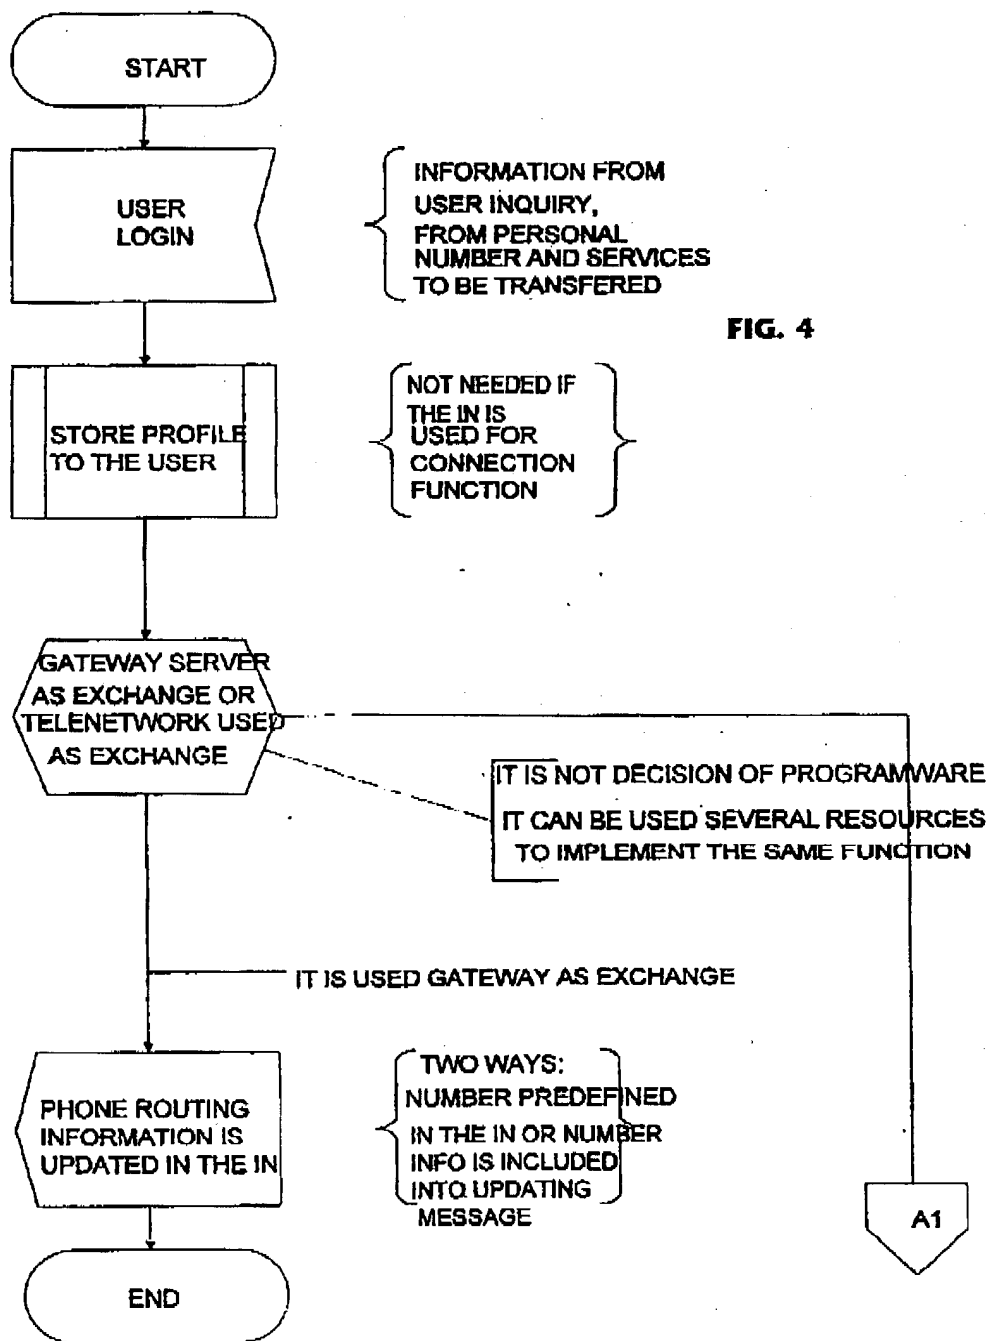

4/5

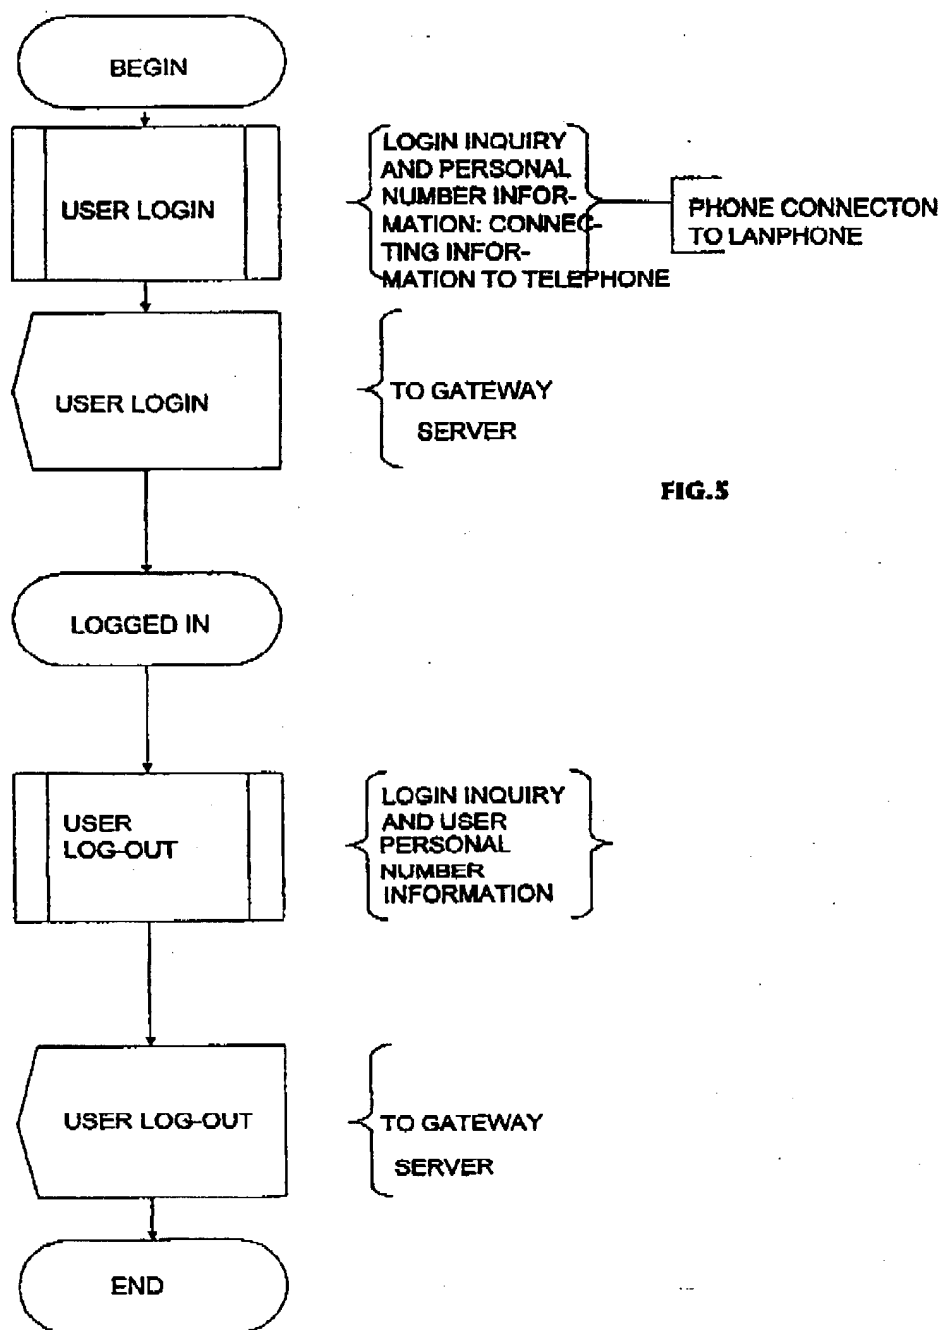


FIG.5

5/5

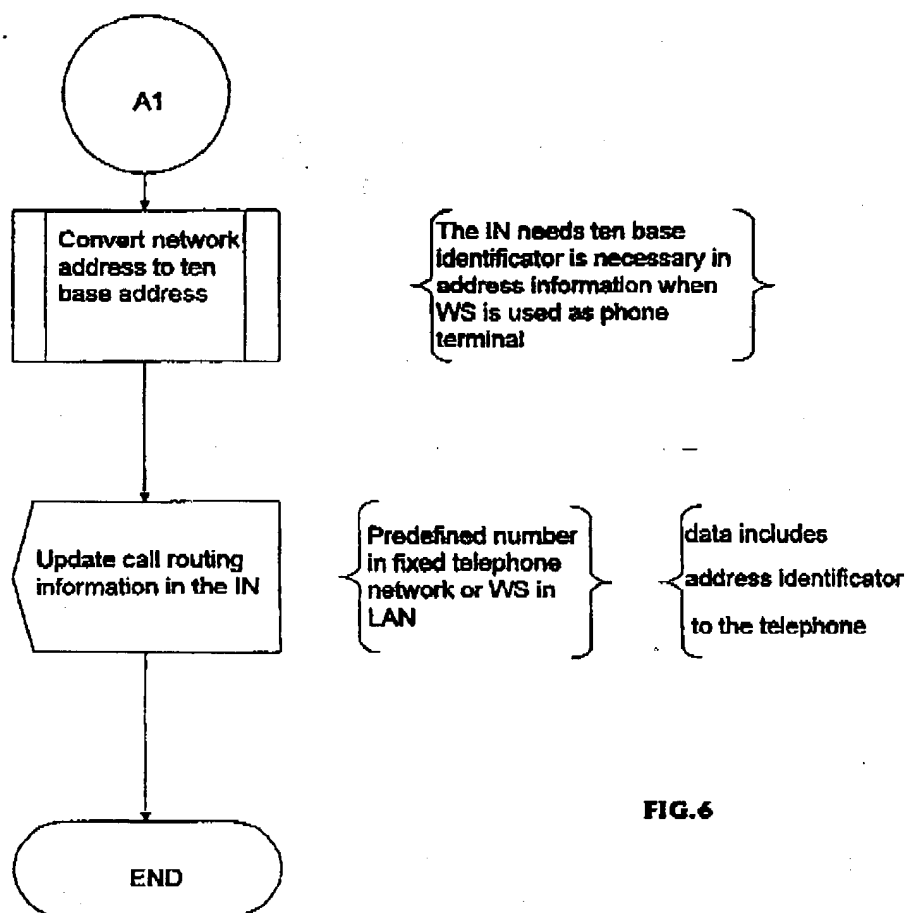


FIG. 6

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 96/00680

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04Q 11/04, H04Q 3/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04L, H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 4225389 C1 (SIEMENS AG), 30 Sept 1993 (30.09.93), abstract --	1-18
A	WO 9428660 A1 (BELL COMMUNICATIONS RESEARCH, INC.), 8 December 1994 (08.12.94), abstract --	1-18
A	EP 0629092 A2 (AT & T CORP), 14 December 1994 (14.12.94), abstract -- -----	1-18

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"A" document member of the same patent family

Date of the actual completion of the international search

20 Sept 1996

Name and mailing address of the ISA:

Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Date of mailing of the international search report

25 -09- 1996

Authorized officer

Göran Magnusson  
Telephone No. +46 8 782 25 00

Form PCT/ISA/210 (second sheet) (July 1992)

**INTERNATIONAL SEARCH REPORT**

International application No.

PCT/SE 96/00680

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC6: H04Q 11/04, H04Q 3/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04L, H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,OK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 4225389 C1 (SIEMENS AG), 30 Sept 1993 (30.09.93), abstract --	1-18
A	WO 9428660 A1 (BELL COMMUNICATIONS RESEARCH, INC.), 8 December 1994 (08.12.94), abstract --	1-18
A	EP 0629092 A2 (AT & T CORP), 14 December 1994 (14.12.94), abstract --	1-18

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to underpin the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"Z" document number of the same patent family

Date of the actual completion of the international search

20 Sept. 1996

Date of mailing of the international search report

25 -09- 1996

Name and mailing address of the ISA:

Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Göran Magnusson  
Telephone No. +46 8 782 25 00

Form PCT/ISA/210 (second sheet) (July 1992)

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

05/09/96

International application No.

PCT/SE 96/00680

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE-C1- 4225389	30/09/93	EP-A- 0581087 FI-A- 933411	02/02/94 01/02/94
WO-A1- 9428660	08/12/94	EP-A- 0682834 US-A- 5539884	22/11/95 23/07/96
EP-A2- 0629092	14/12/94	CA-A- 2125424 CN-A- 1105499 JP-A- 7030688 US-A- 5390169	12/12/94 19/07/95 31/01/95 14/02/95

Form PCT/ISA/210 (patent family annex) (July 1992)